

# LT86101CH --- Product Brief

## Type-C-to-HDMI Converter

### 1. Features

- Compliant to HDMI1.4b, Type-C r1.2, USB PD2.0 and HDMI1.4b Alt Mode v1.0 Standards
- Support Hot-Plug Detect for HDMI Output Interface
- Support DDC and CEC
- Support Only AC Coupled HDMI Output Interface
- Programmable Input Equalization
- Programmable Output Swing and De-emphasis
- USB Full-Featured, Orientation and Role Detection
- 2 Power Roles Supported: Source and Sink
- 2 Data Roles Supported: UFP and DRP
- 3-level Current Ability Detection for Type-C Power:
- USB Default, 1.5A@5V, 3A@5V
- Internal MCU and Flash for Online Firmware Upgrade
- Support External I2C Debug
- 1.8V/3.3V Power Supply
- Packaged in 5mmx5mm QFN40

### 2. General Description

LT86101CH is a TMDS signal re-driver with HDMI1.4b interfaced output and Type-C interfaced input. TMDS signal quality is deeply-optimized and enhanced by performing cable and board trace loss compensation.

The input receiver of LT86101CH features a multi-level programmable linear equalizer, supporting up to 25dB loss compensation due to Inter-Symbol Interference (ISI). The output transmitter re-drives the received signal with multi-level programmable output swing and maximum 6dB de-emphasis. In coordination with DDC

channel, a build-in frequency detector monitors clock channel and automatically adjust input equalization and output swing.

Type-C operating is controlled by CC detect, CC logic and PD management unit. A high performance passive differential switch compliant with HDMI1.4b Alternate Mode is also integrated to realize clock and data channel exchange according to Type-C interface insert orientation. This relieves BOM cost and mobile system design complexity.

LT86101CH internally integrates an 8-bit OCM and SPI flash memory (stacked die) to configure and run program. Online software upgrade is also supported.

The LT86101CH is fabricated in advanced CMOS process and implemented in a small outline 5mmx5mm QFN40 package. This package is RoHS compliant and specified to operate from -40°C to +85°C.

### 3. Applications

- Smartphone, Tablet and Other Mobile Devices
- VR/AR Eco-System and Home Entertainment
- PC, Notebook, All-in-Ones Computer and Docking

### 4. Ordering Information

Table 4.1.1 Ordering Information

Part No.	Operating Temp. Range	Package	Packing
LT86101CH	-40°C to +85°C	QFN40 (5*5)	Tray

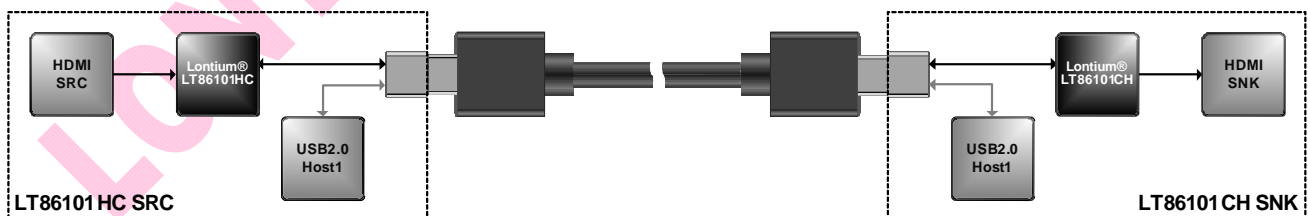


Figure 1. LT86101HC / LT86101CH Typical Application Diagram

**Copyright © 2017 Lontium Semiconductor Corporation, All rights reserved.**

### **Lontium Semiconductor Proprietary & Confidential**

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

### **Trademarks**

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All Other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

**Visit our corporate web page at: [www.lontiumsemi.com](http://www.lontiumsemi.com)**

**Technical support: [support@lontium.com](mailto:support@lontium.com)**

**Sales: [sales@lontium.com](mailto:sales@lontium.com)**