

LT9711UX --- Product Brief

Dual-Port MIPI DPHY/CPHY to DP1.4a Converter

1. Features

● Dual-Port MIPI® DSI/CSI Receiver

- Compliant with D-PHY2.1 & DSI-2 1.0 & CSI-2 2.0
 - 2-port, 1 clock lane and 1/2/3/4 configurable data lanes per port
 - up to 4.5Gbps per data lane
- Compliant with C-PHY1.2 & DSI-2 1.0 & CSI-2 2.0
 - 3.5Gbps per data lane
 - Total 6 configurable data lanes, 1-port 3-lane/2-port 3-lane/3-port 2-lane and 4 port 1-lane support
- Support up to 8K@30Hz YUV422 8bit for CSI D-PHY 8lanes mode
- Support up to 4K@120Hz
- Support up to 8K@60Hz DSC pass-through
- DSI Support 16/20/24-bit YCbCr4:2:2, 16/18/24/30/36-bit RGB
- CSI Support RGB888/666/565, YUV422 8/10bit, YUV420 8bit(legacy)
- Support side by side 3D

● DP1.4a/eDP1.5 Transmitter

- Compliant with DisplayPort specification 1.4a for 1.62Gbps, 2.7Gbps, 5.4Gbps, 8.1Gbps
- Compliant Embedded DisplayPort specification version 1.5
- Support DisplayPort 1/2/4 lanes
- Support HDCP 1.3/2.3
- Support HDCP repeater
- Support RGB 6/8/10/12 bpc, YCbCr4:4:4/YCbCr4:2:2/YCbCr4:2:0 8/10/12 bpc
- Support up to 8K@30Hz RGB 6bpc, YCbCr4:2:2 10 bpc or YCbCr4:2:0 12 bpc
- Support up to 4K@144Hz RGB 6bpc, YCbCr4:2:2 10 bpc or YCbCr4:2:0 12 bpc
- Support up to 8K@60Hz DSC pass-through

- Support HDR10
- Support FEC
- Support Adaptive-Sync
- Support ASSR for eDP
- Support Horizontal Blanking Expansion
- Support SSC
- MCCS over AUX channel

● USB Type-C

- Compliant with VESA DisplayPort alt mode on USB Type-C standard 1.0
- DP alt mode only support pin assignment C and E
- Compliant with USB power delivery specification 3.0
- Compliant with USB Type-C cable and connector specification 1.3
- Built-in dual CC logic and PD controller for charger and normal communication
- Data roles supported: DFP
- Power Roles Supported: source, sink and DRP
- Support USB Billboard

● Digital Audio Input

- I2S interface supports up to 2-channel audio, with sample rates of 32~192 KHz and sample sizes of 16~24 bits
- SPDIF interface supports PCM, Dolby digital, DTS digital audio at up to 192KHz frame rate
- Compliant with IEC60958 or IEC61937

● Miscellaneous

- CSC: RGB <-> YUV444 <-> YUV422<-> YUV420
- Hactive up to 10K
- Integrated 100/400KHz I2C slave
- External oscillator 25MHz, +/-50ppm
- Integrated microprocessor
- Embedded SPI flash for firmware and HDCP keys
- Firmware update through SPI or I2C or USB interface
- Power supply: 3.3V and 1.1V

2. General Description

LT9711UX is a high performance Dual-Port MIPI DPHY/CPHY to DP1.4 converter.

For MIPI DPHY input, LT9711UX can be configured as 2 Ports and 1/2/4 lanes per port. Up to 12dB equalization makes it suitable for long distance application and the maximum bandwidth is up to 36Gbps.

For MIPI CPHY input, LT9711UX has 6 data lanes up to 3.5Gbps per data lane, it can be configured as 1/2/3/4 ports. The maximum equalization is 12dB and the maximum bandwidth is up to 47.88Gbps.

For DP1.4a/ eDP1.5 output, it consists of 4 data lanes, supporting 1.62Gbps, 2.7Gbps, 5.4Gbps and 8.1Gbps link rate. The build-in optional SSC function reduces EMI effect. It allow for the highest resolutions of 4K@144Hz or 8K@60Hz with compression data.

In order to be adaptable to the latest USB Type-C system,

LT9711UX integrates CC logic and PD controller to relieve mobile system design complexity and BOM cost.

Two digital audio input interfaces are available, I2S and SPDIF. The I2S interface supports 8-ch LPCM and the SPDIF interface supports 2-ch LPCM or compressed audio, both at maximum 192 KHz sample rate.

The device is capable of automatic operation which is enabled by an integrated microprocessor that uses an embedded SPI flash for firmware storage. System control is also available through the configuration I2C slave interface.

3. Applications

- Notebook
- PC
- Video conference
- In-Vehicle Infotainment
- Display monitor



Figure 3.1 Application Diagram

4. Ordering Information

Table 4.1 Ordering Information

Product Name	Part Number	Product Status	Package	Bonding Wire	Grade	Operating Temperature Range	Stack Die Option	Packing Method	MPQ
LT9711UX	LT9711UX_U1Q04CED	Preview	QFN76 (9*9)Saw	Cu	E	TBD	D	Tray	2600pcs

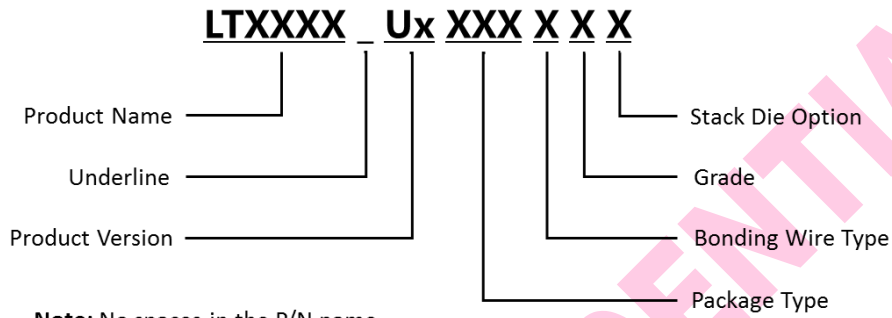


Figure 4.1 Part Number Naming Rules

Copyright © 2024 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com