

LT9611GX --- Product Brief

Dual-Port MIPI DPHY/CPHY to HD-DVI2.1 Converter

1. Features

● Dual-Port MIPI® DSI/CSI Receiver

- Compliant with D-PHY2.1 & DSI-2 1.0 & CSI-2 2.0
 - 2-port, 1 clock lane and 1/2/3/4 configurable data lanes per port
 - up to 4.5Gbps per data lane
- Compliant with C-PHY1.2 & DSI-2 1.0 & CSI-2 2.0
 - 3.5Gbps per data lane
 - Total 6 configurable data lanes, 1-port 3-lane/2-port 3-lane/3-port 2-lane and 4 port 1-lane support
- Support up to 8K@30Hz YUV422 8bit for CSI D-PHY 8lanes mode
- Support up to 4K@120Hz
- Support up to 8K@60Hz DSC pass-through
- DSI Support 16/20/24-bit YCbCr4:2:2, 16/18/24/30/36-bit RGB
- CSI Support RGB888/666/565, YUV422 8/10bit, YUV420 8bit(legacy)
- Support side by side 3D

● HD-DVI2.1 Transmitter

- Data rate up to 12Gbps
- Support HDCP 1.4/2.2/2.3
- Support HDCP repeater
- Support RGB 8/10/12 bpc, YCbCr4:4:4/ YCbCr4:2:2/ YCbCr4:2:0 /8/10/12 bpc
- Support up to 8K@30Hz RGB/YCbCr4:4:4/ YCbCr4:2:2 8bpc or YCbCr4:2:0 12 bpc
- Support up to 4K@120Hz RGB/YCbCr4:4:4/ YCbCr4:2:2 8bpc or YCbCr4:2:0 12 bpc
- Support up to 8K@60Hz DSC pass-through
- Support static HDR10
- Support FEC
- Support CES(Consumer Electronics Service)

● Digital Audio Input

- I2S interface supports up to 8-channel audio, with sample rates of 32~192 KHz and sample sizes of 16~24 bits
- SPDIF interface supports PCM, Dolby digital, DTS digital audio at up to 192KHz frame rate
- Compliant with IEC60958 or IEC61937

● Miscellaneous

- CSC: RGB <-> YUV444 <-> YUV422<-> YUV420
- Hactive up to 10K
- Integrated 100/400KHz I2C slave
- External oscillator 25MHz, +/-50ppm
- Integrated microprocessor
- Embedded SPI flash for firmware and HDCP keys
- Firmware update through SPI or I2C or USB interface
- Power supply: 3.3V and 1.1V

2. General Description

LT9611GX is a high performance Dual-Port MIPI DPHY/CPHY to HD-DVI2.1 converter.

For MIPI DPHY input, LT9611GX can be configured as 2 Ports and 1/2/4 lanes per port. Up to 12dB equalization makes it suitable for long distance application and the maximum bandwidth is up to 36Gbps.

For MIPI CPHY input, LT9611GX has 6 data lanes up to 3.5Gbps per data lane, it can be configured as 1/2/3/4 ports. The maximum equalization is 12dB and the maximum bandwidth is up to 47.88Gbps.

For HD-DVI2.1 output, LT9611GX can be configured as 3/4 lanes. The maximum bandwidth is up to 48Gbps. It allow for the highest resolutions of 8K@30Hz or 8K@60Hz with compression data.

Two digital audio input interfaces are available, I2S or SPDIF. The I2S interface supports 8-ch LPCM and the SPDIF interface supports 2-ch LPCM or compressed audio, both at maximum 192 KHz sample rate.

The device is capable of automatic operation which is

enabled by an integrated microprocessor that uses an embedded SPI flash for firmware storage. System control is also available through the configuration I2C slave interface.

- Notebook
- PC
- Video conference
- In-Vehicle Infotainment
- Display monitor

3. Applications

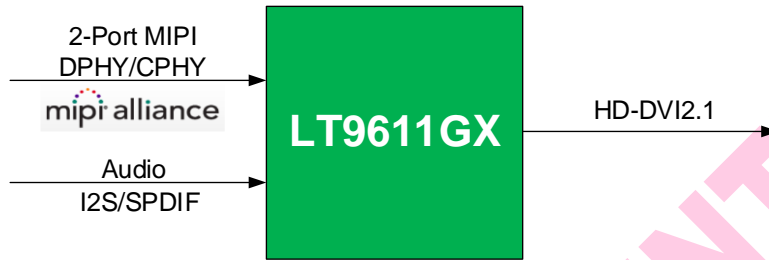


Figure 3.1 Application Diagram

4. Ordering Information

Table 4.1 Ordering Information

Product Name	Part Number	Product Status	Package	Bonding Wire	Grade	Operating Temperature Range	Stack Die Option	Packing Method	MPQ
LT9611GX	LT9611GX_U1Q04CED	Preview	QFN76 (9*9)Saw	Cu	E	TBD	D	Tray	2600pcs

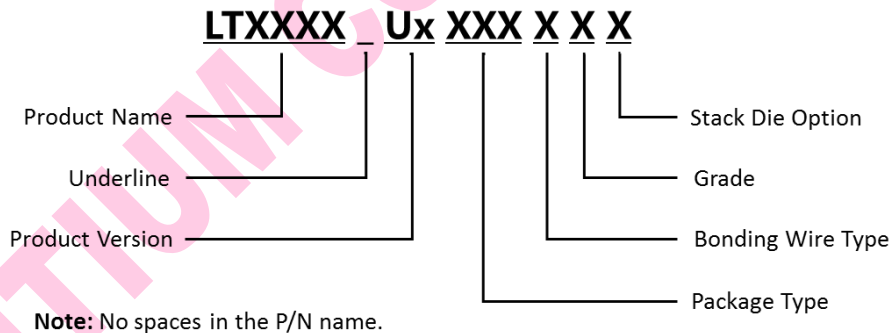


Figure 4.1 Part Number Naming Rules

Copyright © 2024 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com