

LT8612UX --- Product Brief

HD-DVI2.0 to HD-DVI2.0 and VGA Converter with Audio

1. Features

● HD-DVI2.0 Receiver

- Compliant with HD-DVI2.0b, HD-DVI1.4 and DVI1.0
- Compliant with HDCP2.3, HDCP2.2 and HDCP1.4
- Data rate up to 6Gbps
- Support up to 4Kx2K@60Hz
- Adaptive receiver equalization
- Support data channel swap(arbitrarily) and polarity inversion(independent)
- AC and DC couple capable
- Support HDCP repeater
- Support 3D and HDR
- Support 8/10/12-bit color depth
- Support TMDS descrambling for EMI/RFI reduction
- Support ACDC (Auxiliary and Control Data Channel) and CES (Consumer Electronics Service)2.0
- Integrated EDID shadow
- 5V tolerance DDC/HPD I/Os

● HD-DVI2.0 Transmitter

- Compliant with HD-DVI2.0b, HD-DVI1.4 and DVI1.0
- Compliant with HDCP2.3, HDCP2.2 and HDCP1.4
- Data rate up to 6Gbps
- Support up to 4Kx2K@60Hz
- Programmable transmitter swing and pre-emphasis
- Support channel swap(arbitrarily) and polarity inversion(independent)
- DC couple capable
- Downstream receiver sensing
- Support 3D and HDR
- Support 8/10/12-bit color depth
- Support TMDS scrambling for EMI/RFI reduction
- Support ACDC (Auxiliary and Control Data Channel) and CES (Consumer Electronics Service)2.0
- 5V tolerance DDC/HPD I/Os

● Triple-Channel Video DAC

- Compliant with VESA VSIS1.2
- Support WUXGA timing and up to 200MSPS throughput
- Support CSC(Color Space Conversion) from YCbCr 4:2:2 to YCbCr 4:4:4 and YCbCr 4:4:4 to RGB
- Only support separate SYNC
- Amplitude calibration
- R/B swappable
- Load sensing
- 5V tolerance DDC I/Os

● Digital Audio Output

- Up to four I2S interface supporting 8-channel audio, with sample rates of 32~192 kHz and sample sizes of 16~24 bits
- SPDIF interface supporting PCM, Dolby Digital, DTS digital audio at up to 192kHz frame rate
- IEC60958 or IEC61937 compatible

● Miscellaneous

- Internal term calibration
- External crystal supports 25MHz
- Integrated microprocessor
- Integrated SPI master for embedded SPI flash
- Embedded SPI flash for firmware and HDCP keys
- Integrated 100/400kHz I2C slave for debug and firmware update
- 1.2V core power supply & 3.3V I/O power supply

2. General Description

The LT8612UX is a HD-DVI to HD-DVI&VGA converter, which converts HD-DVI2.0 data streams to HD-DVI2.0 signals and analog RGB signals. It also outputs 8 channel I2S and SPDIF signals which enable high quality 7.1 channel audio.

The LT8612UX uses the latest ClearEdge™ Technology to expand a VGA interface in addition to original HD-DVI interface.

3. Applications

- Digital Signage
- PC, Laptop Mother Boards
- HD-DVI to VGA Dongle
- Car Entertainment System

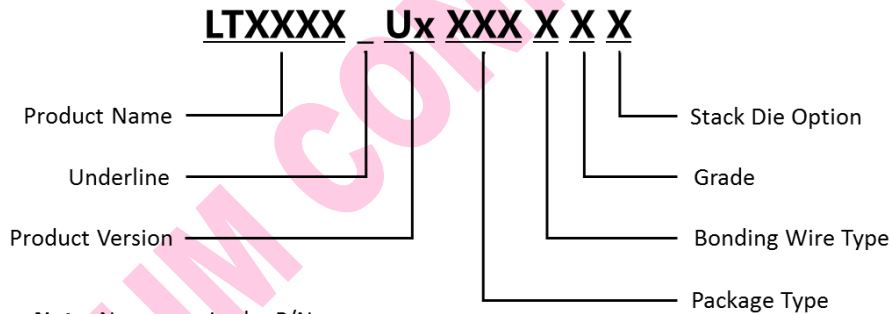


Figure 3.1 Application Diagram

4. Ordering Information

Table 4.1 Ordering Information

Product Name	Part Number	Product Status	Package	Bonding Wire	Grade	Operating Temperature Range	Stack Die Option	Packing Method	MPQ
LT8612UX	LT8612UX_U5Q04CED	Preview	QFN76 (9*9)Saw	Cu	E	-40°C to +85°C	D	Tray	2600pcs



Note: No spaces in the P/N name.

Figure 4.1 Part Number Naming Rules

Copyright © 2024 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

Trademarks

Lontium™ 龙迅™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com