

LT8711X --- Product Brief

DP to VGA Converter with USB Type-C Support

Features

- DisplayPort receiver
 - DP 1.2 compliant
 - HDCP 1.3 compliant
 - Link rate 5.4/2.7/1.62Gbps (HBR2/HBR/RBR)
 - 1/2/4 lanes
 - Integrated CC controller for USB type-C Alt Mode support
 - 1Mbps AUX channel
 - Equalizer
- Video DAC
 - VSIS 1.2 compliant
 - 200MSPS throughput
 - WUXGA timing
 - R/B swappable
 - YPbPr output capable
 - Separate SYNC or embedded SYNC (SOG/SOY)
 - Load sensing
 - Amplitude calibration
 - 5V tolerance DDC I/Os
- Digital audio output
 - I2S and SPDIF
 - 8-channel LPCM or compressed audio
 - Sample rate up to 192kHz
- Integrated MCU with embedded SPI flash
- Power supply: 3.3V for I/O and 1.2V for core

Description

The LT8711X is a DisplayPort(DP) to VGA converter, designed to connect a DP source to a VGA sink. The LT8711X integrates a DP 1.2 compliant receiver, and a high-speed triple-channel video DAC. The receiver port integrates a CC controller which enables DP Alternate Mode support when connected to a USB Type-C source.

The device is capable of automatic operation that is enabled by an integrated MCU that uses an embedded SPI flash for microcode. System control is also available through the use of a dedicated configuration I2C slave interface.


Two package types are available, LT8711X-A and LT8711X-B, and both are provided in a 64-lead QFN package with ePad and specified over -40 °C to +85 °C operating temperature range.

Application

Docking station

DP-to-VGA dongle/adaptor

Block Diagram

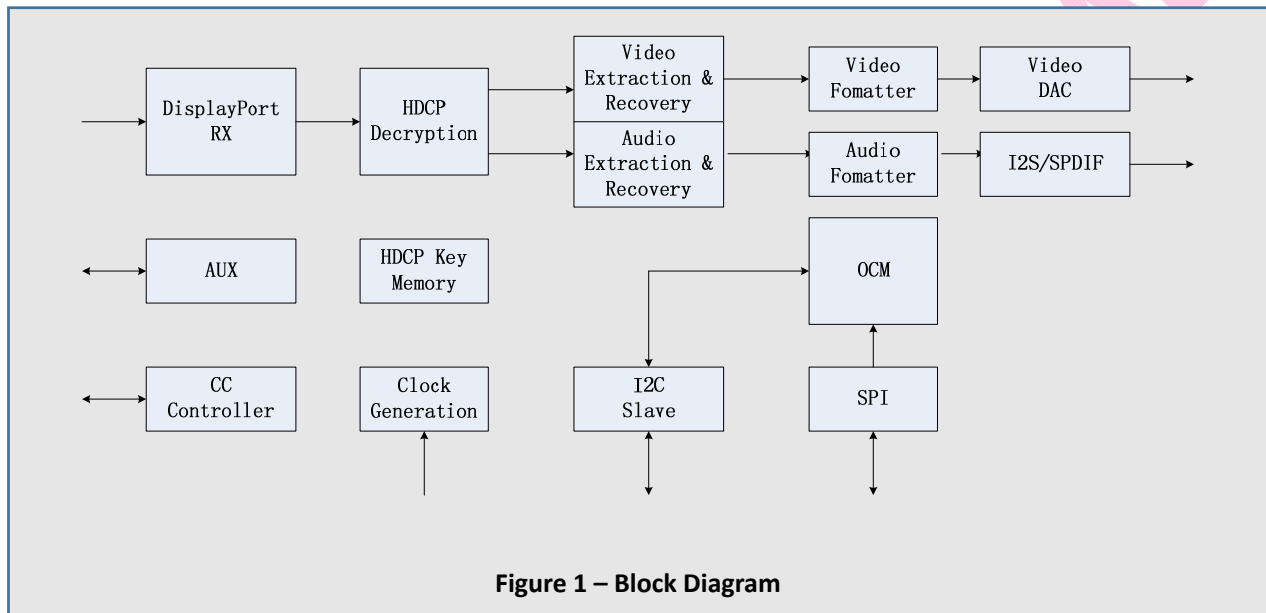

Ordering Information

Part Number	Operating Temperature Range	Package	Packing Method
LT8711X-A	-40°C to +85°C	QFN64 7.5*7.5	Tray
LT8711X-B	-40°C to +85°C	QFN64 7.5*7.5	Tray

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT. LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property it embodies.

Trademarks

Lontium™ and ClearedEdge™ is a registered trademark of Lontium Semiconductor. All Other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com